



# EXHAUST FAN



Octopus

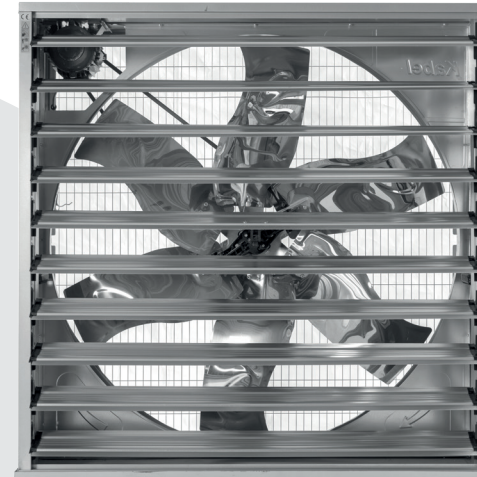

Kabel Maxi 1380

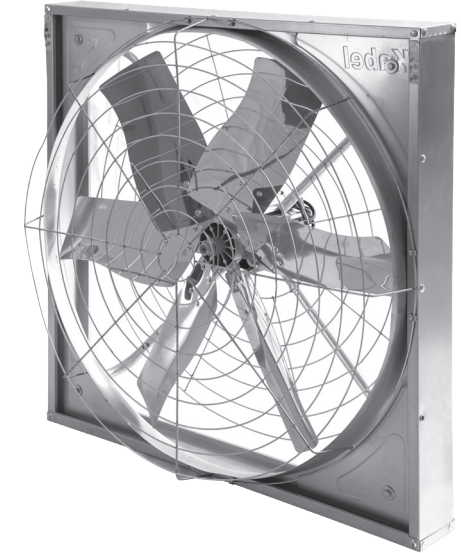


- Stainless steel fan blades
- Maximum blade efficiency and special inclined blade design
- Maximum energy saving
- Automatically opened blinds on the front panel
- Special design protection wire on the back panel

## Areas of Usage:

- In close areas having ventilation problems;
- For ventilating and cooling of poultry farms,
- For ventilating and cooling of cattle stables,
- For ventilating and cooling of green houses,
- For clearing away the gas, smoke, dust, odour, etc. in factories, workshop and similar places ...

## FAN DIMENSIONS

MODEL	A (mm)	B (mm)
Kabel Maxi 1380	1380	450
Kabel 1380	1380	400
Kabel 1000	1000	400

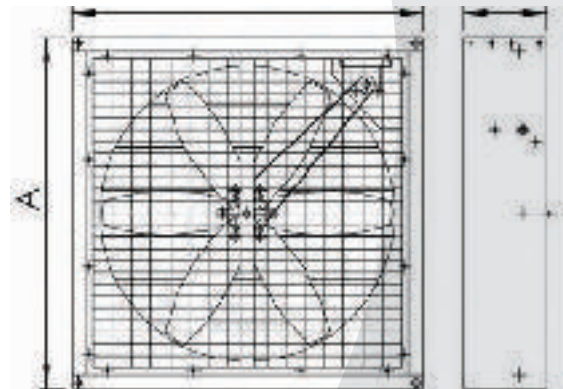

## PERFORMANCE CURVES



## TECHNICAL SPECIFICATIONS

MODEL	Kabel Maxi 1380	Kabel 1380	Kabel 1000
Wing Material	Stainless Steel	Stainless Steel	Stainless Steel
Fan Speed	3 phase, Single Stage	3 phase, Single Stage	3 phase, Single Stage
Fan Diameter	1250 mm	1250 mm	900 mm
Motor Speed	1440 rpm	1440 rpm	1440 rpm
Air Flow	44.500 m <sup>3</sup> /h	44.500 m <sup>3</sup> /h	22.500 m <sup>3</sup> /h
Sound	≤65 dB	≤65 dB	≤65 dB
Power	1100 W	1100 W	750 W
Nominal Voltage	380 V	380 V	380 V
Weight	78 kg	68 kg	47 kg
Damper Opening Mechanism	Automatic	Wind Pushy	Wind Pushy

## MOTOR TECHNICAL SPECIFICATIONS

	Kabel Maxi 1380	Kabel 1380	Kabel 1000
Power	1,1 kW	1,1 kW	0,75 kW
Voltage	380 V	380 V	380 V
Frequency	50 Hz	50 Hz	50 Hz
Motor Efficiency Class	IE2	IE2	IE2
Motor Protection Class	IP55	IP55	IP55

The motor is specially manufactured by **Volt Electric Motors** for Alindair Cooling Systems.

